1

100884452 060502

(12) INTERNATIONAL APP.. ,TION PUBLISHED UNDER THE PATENT C. 'ERATION TREATY (PCT)

(51) International Patent Classification⁷: H04Q 7/38

(21) International Application Number: PCT/EP00/09100

(22) International Filing Date:
13 September 2000 (13.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9921706.9   14 September 1999 (14.09.1999)   GB

(71) Applicant *(for all designated States except US)*: NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventor; and
(75) Inventor/Applicant *(for US only)*: AHMAVAARA, Kalle [FI/JP]; Nokia Japan Co Ltd, 2-13-5, Nagata-cho, Chiyoda-ku, Tokyo 100-0014 (JP).

(74) Agents: RUUSKANEN, Juha-Pekka et al.; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

(54) Title: RELOCATION IN A COMMUNICATION SYSTEM
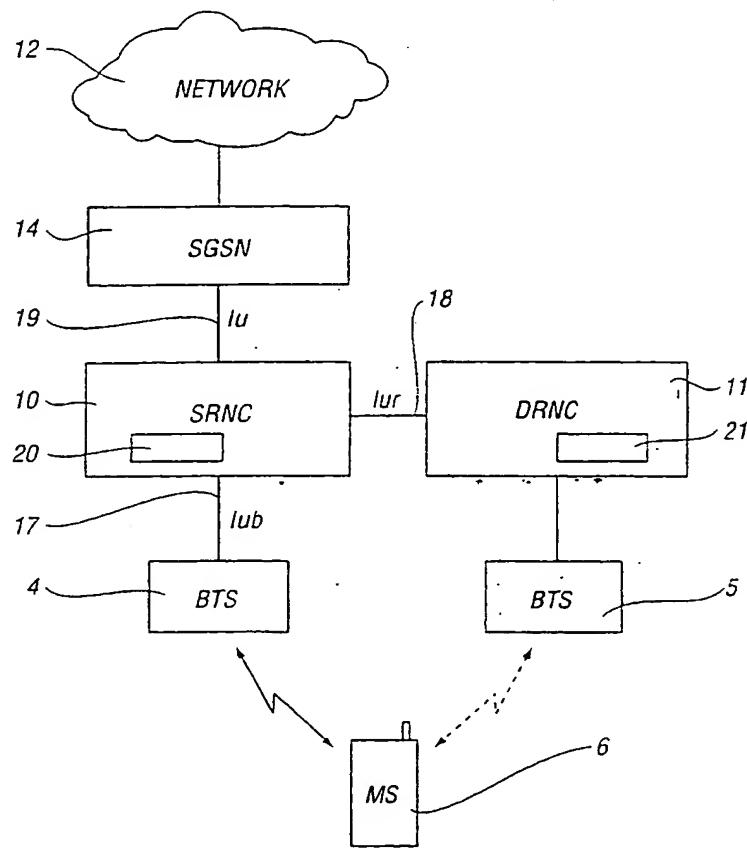
(57) Abstract: The present invnetion relates to relocation of a protocol termination point in a communication system comprising a first protocol termination point, a second protocol termination point and control means for relocating a first protocol from the first protocol termination point to the second protocol termination point. A protocol initialization unit that contains predefined information of the first termination point is defined by means of the first protocol. The protocol initialization unit is subsequently transferred from the first termination point to the second termination point by means of a second protocol. The second termination point is initialized based on the received protocol initialization unit.

WO 01/20938 A1